## MOBILE COMPUTING ARCHITECTURE— AN OVERVIEW

## Lesson 06 Mobile Computing Software architecture

#### MOBILE COMPUTING ARCHITECTURE

- Programming languages used for mobile system software
- Operating system functions to run the software components onto the hardware
- Middleware components deployment

#### MOBILE COMPUTING ARCHITECTURE

- Layered structure arrangement of mobile computing components
- Protocols and layers used for transmission and reception

#### PROGRAMMING LANGUAGES

- Java—J2SE.
- J2ME (Java2 Micro edition)
- JavaCard (Java for smart card
- The Java enterprise edition (J2EE) used for web and enterprise server based applications of mobile services

#### PROGRAMMING LANGUAGES

- C, C++, Python
- Visual C++
- Visual Basic.

- iOSx, Mac OSx and Android Oreo
- Offers the user to run an application without considering the hardware specifications and functionalities
- Provides functions which are used for scheduling the multiple tasks in a system

- Provides the functions required for the synchronization of multiple tasks in the system
- Multiple threads synchronization and priority allocation
- Management functions (such as creation, activation, deletion, suspension, and delay) for tasks and memory

- Provides Interfaces for communication between software components at the application layer, middleware layers, and hardware devices
- Facilitates execution of software components on diversified hardware.
- Provides Configurable libraries for the GUI (graphic user interface) in the device.

- Provides User application's GUIs, VUI (voice user interface) components, and phone API
- Provides the device drivers for the keyboard, display, USB, and other devices


#### MIDDLEWARE FOR MOBILE SYSTEMS

- Software components that link the application components with the network-distributed components
- To discover the nearby device such as Bluetooth
- To discover the nearby hot spot

#### MIDDLEWARE FOR MOBILE SYSTEMS

- For achieving device synchronization with the server or an enterprise server
- For retrieving data (which may be in Oracle or DB2) from a network database
- For service discovery at network
- For adaptation of the application to the platform and service availability

# MOBILE COMPUTING ARCHITECTURAL LAYERS

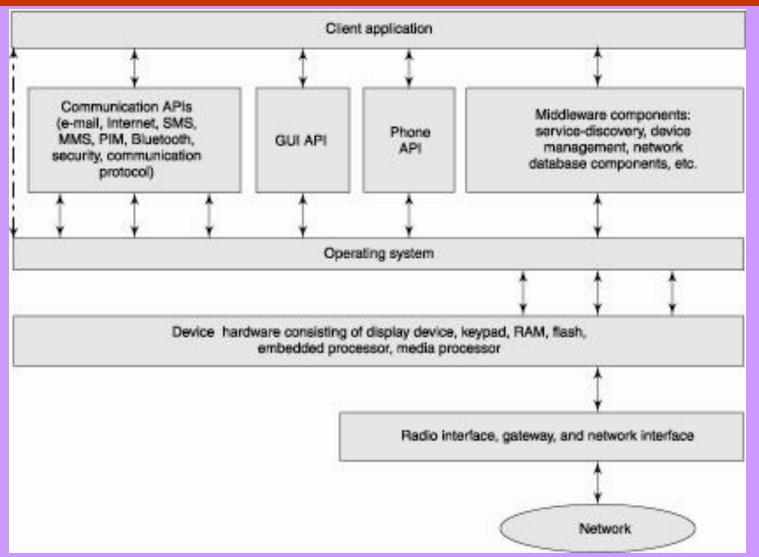

### MOBILE COMPUTING SERVICES PROTOCOLS

- Such as GSM 900, GSM900/1800/1900, UMTS, and I-Mode
- WPAN protocols— Bluetooth, IrDA, and Zigbee)
- WLAN protocols —for example, 802.11a and 802.11b)
- WAP

#### MOBILE COMPUTING SYSTEM LAYERS

- 1. Physical for sending and receiving signals (for example, TDMA or CDMA coding)
- 2. Data-link (for example, multiplexing)
- 3. Networking (for linking to the destination)

. . .

#### ... Mobile Computing system Layers

- 4. Wireless transport layer security (for establishing end-to-end connectivity)
- 5. Wireless transaction protocol
- 6. Wireless session protocol
- 7. Wireless application environment (for running a web application, for example, mobile e-business)

#### SUMMARY

- Mobile Computing Programming languages— Java, J2ME, C/C++, Python, Visual Basic, visual C++
- OS— Window phone 8, iOSx, Mac OS and Android
- Middleware components
- Architecture software layers
- Protocols layers
- Network Layers

# End of Lesson 06 Mobile Computing Architecture